

TRINCIATRICI IDRAULICHE


Robuste e Versatili
per escavatori da 1,5 a 25 Ton

HYDRAULIC MULCHERS

Robust and versatile for excavators
from 1.5 to 25 Tons

HTE LN

Trinciatrice simmetrica **PER ESCAVATORI DA 1.2 - 2.5 TON**
Symmetrical mulcher **FOR EXCAVATORS FROM 1.2 - 2.5 TON**

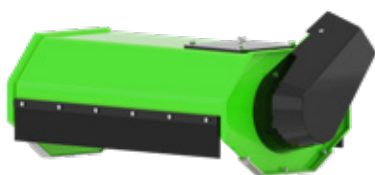

	Larg. taglio Cutting width	Peso Weight	Portata olio Oil flow rate	Pressione max. Pressure max	Peso escav. Excav.weight
HTE 60 LN	60 cm	70 kg	20-30 L/min	170 - 220 bar	1.2 - 2.5 tons
HTE 80 LN	80 cm	80 kg	20-30 L/min	170 - 220 bar	1.2 - 2.5 tons

HTE LT


Trinciatrice con rotore elicoidale **PER ESCAVATORI DA 1.5 - 8 TON**
Helical flail hammers mulchers **FOR EXCAVATORS FROM 1.5 - 8 TON**



HTE 60-80 LT



HTE 100 LT

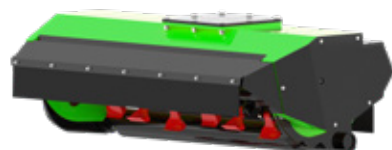

HTE 105 125 LT



	Taglio Max Max cutting Ø	Larg. taglio Cutting width	Peso Weight	Portata olio Oil flow rate	Pressione max. Pressure max	Peso escav. Excav.weight
HTE 60 LT	5 cm	60 cm	130 kg	20-40 L/min	170 - 220 bar	1.5 - 3.5 tons
HTE 80 LT	5 cm	80 cm	150 kg	30-30 L/min	170 - 220 bar	2.0 - 4.0 tons
HTE 100 LT	5 cm	100 cm	190 kg	40-60 L/min	170 - 220 bar	4.0 - 6.0 tons
HTE 105 LT	8 cm	105 cm	220 kg	60-80 L/min	170 - 220 bar	5.0 - 8.0 tons
HTE 125 LT	8 cm	125 cm	250 kg	60-80 L/min	170 - 220 bar	6.0 - 8.0 tons



HTE REV

Trinciatrice simmetrica **PER ESCAVATORI DA 4 - 12 TON**
 Symmetrical mulcher **FOR EXCAVATORS FROM 4 - 12 TON**



HTE 60-80-100 REV



REV



REV FS



REV DF

	Taglio Max Max cutting Ø	Larg. taglio Cutting width	Peso Weight	Portata olio Oil flow rate	Pressione max. Pressure max	Peso escav. Excav.weight
HTE 60 REV	8 cm	60 cm	180 Kg	30 L/min	170 - 220 bar	3.5 - 5.0 tons
HTE 80 REV	8 cm	80 cm	260 Kg	40-80 L/min	170 - 220 bar	4.0 - 8.0 tons
HTE 100 REV	8 cm	100 cm	310 Kg	40-90 L/min	200 - 220 bar	6.0 - 12.0 tons
HTE 60 REV FS	12 cm	60 cm	290 Kg	40-80 L/min	200 - 220 bar	5.0 - 8.0 tons
HTE 80 REV FS	12 cm	80cm	330 Kg	50-90 L/min	200 - 220 bar	6.0 - 8.0 tons
HTE 100 REV FS	12 cm	100 cm	400 Kg	50-90 L/min	200 - 220 bar	6.0 - 12.0 tons
HTE 60 REV DF	20 / 25 cm	60 cm	340 Kg	40-80 L/min	200 - 220 bar	5.0 - 8.0 tons
HTE 80 REV DF	20 / 25 cm	80 cm	400 Kg	50-90 L/min	200 - 220 bar	6.0 - 12.0 tons
HTE 100 REV DF	20 / 25 cm	100 cm	490 Kg	50-90 L/min	200 - 220 bar	8.0 - 12.0 tons



HTE REV HD

Trinciatrice simmetrica **PER ESCAVATORI DA 8 – 16 TON**
Symmetrical mulcher **FOR EXCAVATORS FROM 8 – 16 TON**



REV



REV FS



REV DF

	Taglio Max <i>Max cutting Ø</i>	Larg. taglio <i>Cutting width</i>	Peso <i>Weight</i>	Portata olio <i>Oil flow rate</i>	Pressione max. <i>Pressure max</i>	Peso escav. <i>Excav.weight</i>
HTE 100 REV HD	8 cm	100 cm	480 Kg	80-100 L/min	200 – 220 bar	8.0 – 16.0 tons
HTE 130 REV HD	8 cm	130 cm	540 Kg	80-100 L/min	200 – 220 bar	8.0 – 16.0 tons
HTE 100 REV HD FS	12 cm	100 cm	580 Kg	80-100 L/min	200 – 220 bar	10.0 – 16.0 tons
HTE 130 REV HD FS	12 cm	130 cm	650 Kg	80-100 L/min	200 – 220 bar	10.0 – 16.0 tons
HTE 130 REV HD DF	20 / 25 cm	100 cm	685 Kg	80-100 L/min	200 – 220 bar	10.0 – 16.0 tons
HTE 100 REV DF	20 / 25 cm	130 cm	745 Kg	80-100 L/min	200 – 220 bar	10.0 – 16.0 tons

HTE EVOREV

Trinciatrice simmetrica **PER ESCAVATORI DA 10-25 TON**
Symmetrical mulcher **FOR EXCAVATORS FROM 10 – 25 TON**



EVOREV FR



EVOREV DF

	Taglio Max <i>Max cutting Ø</i>	Larg. taglio <i>Cutting width</i>	Peso <i>Weight</i>	Portata olio <i>Oil flow rate</i>	Pressione max. <i>Pressure max</i>	Peso escav. <i>Excav.weight</i>
HTE EVOREV 130	8 cm	130 cm	650 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons
HTE EVOREV 160	8 cm	160 cm	750 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons
HTE EVOREV 130 FR	25 cm	130 cm	920 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons
HTE EVOREV 160 FR	25 cm	160 cm	1020 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons
HTE EVOREV 130 DF	20 / 25 cm	130 cm	950 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons
HTE EVOREV 160 DF	20 / 25 cm	160 cm	1050 Kg	90-180 L/min	200 – 250 bar	10.0 – 25.0 tons



HTE S

Trinciatrici idrauliche frontali **per minipale 35 – 70 kW**
Hydraulic Mulchers **for Skid Steer loaders 35 – 70 kW**








	Taglio Max Max cutting Ø	Larg. taglio Cutting width	Peso Weight	Portata olio Oil flow rate	Pressione max. Pressure max	Minipala Skid power
HTE S160	8 cm	160 cm	890 Kg	60-100 L/min	200 - 220 bar	35 - 70 kW
HTE S180	8 cm	180 cm	930 Kg	60-100 L/min	200 - 220 bar	35 - 70 kW
HTE S200	8 cm	200 cm	970 Kg	60-100 L/min	200 - 220 bar	35 - 70 kW





HTE WDF

Trinciatrici idrauliche frontali **per minipale 50 – 90 kW**
Hydraulic Mulchers **for Skid Steer loaders 50 – 90 kW**



	Taglio Max Max cutting Ø	Larg. taglio Cutting width	Peso Weight	Portata olio Oil flow rate	Pressione max. Pressure max	Minipala Skid power
HTE WDF 160	30 cm	160 cm	1285 Kg	60-100 L/min	200 - 350 bar	50 - 90 kW
HTE WDF 180	30 cm	180 cm	1420 Kg	60-100 L/min	200 - 350 bar	50 - 90 kW

	Modello trincia Mulcher model	Taglio Max Max cut. Ø
	MZ1 HTE 60-80 LN	3 cm
	MZ2 HTE 60 - 80 - 100 LT	5cm
	MZ3 HTE 105 -125 LT / HTE 60 - 80 -100 REV	8 cm
	FS1 HTE 60 - 80 - 100 REV DF	12cm
	MZ4 HTE 105 - 130 REV HD - HTE EVOREV - HTE S	8 cm

	Modello trincia Mulcher model	Taglio Max Max cut. Ø
	FS2 HTE 105 - 130 REV HD FS	12cm
	FR HTE EVOREV FR	25 cm
	DF1 HTE 60 - 80 - 100 REV DF / HTE105 - 130 REV HD DF / EVOREV 130 -160 DF - HTE W	25 cm
	DF1L HTE 60 - 80 - 100 REV DF / HTE105 - 130 REV HD DF / EVOREV 130 -160 DF - HTE W	20 cm

